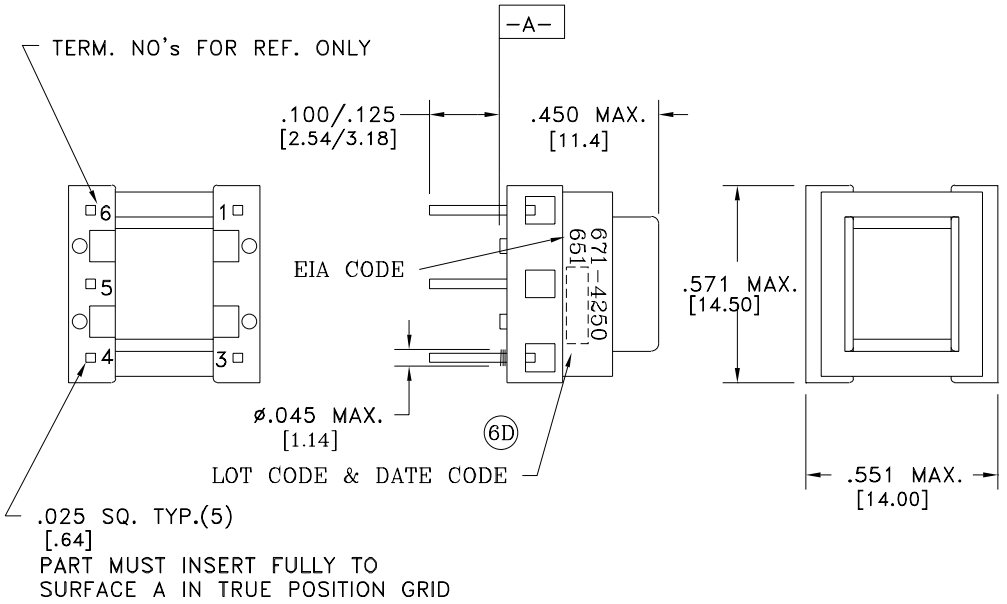



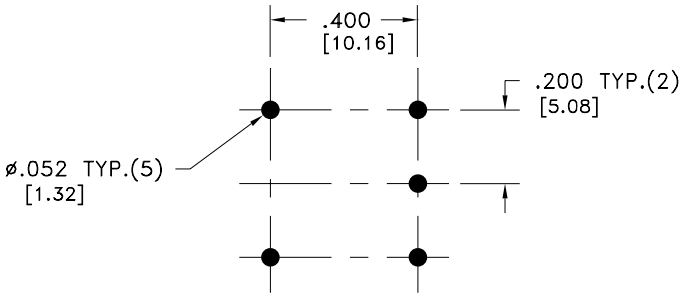

TRUE POSITION GRID
(P.C. PATTERN, COMPONENT SIDE)

SPECIFICATIONS:

D.C. RESISTANCE: 10.5 – 13.6 ohms.

D.C. BIAS: 70mA max.

6B DIELECTRIC TEST: 1250VAC, 1-core.

INDUCTANCE: 6.52mH ±5%

FILTER designed to resonate at either 12kHz or 16kHz.

See Application Drawings for Circuit Schematics.

Midcom, Inc.
Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals:±.005(.127mm)

DRAWING TITLE
INDUCTOR

REVISIONS: SEE SHEET 1

Midcom

DRAWING NO. **671-4250**
REV. 6D
SCALE ---
SHEET 2 OF 5

DWG.# 671-4250