

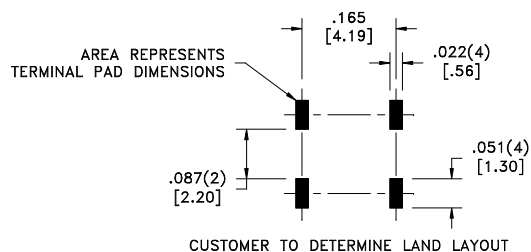



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
-LF1	Sn96%, Ag4%	Yes	Yes

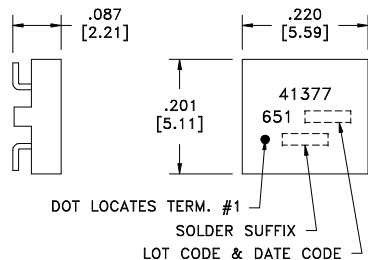

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.140 ohms max.
D.C. RESISTANCE	4-3 @20°C	0.140 ohms max.
INDUCTANCE	1-2 100kHz, 100mVAC, Ls	2.2uH ±30%
INDUCTANCE	4-3 100kHz, 100mVAC, Ls	2.2uH ±30%
DIELECTRIC	1-4 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-2):(4-3)	1:1, ±1%
COMMON MODE ATTENUATION	10MHz	-15dB typ.
COMMON MODE ATTENUATION	30MHz	-25dB typ.
COMMON MODE ATTENUATION	100MHz	-30dB typ.



REV.	DATE
6A	2/09

DETAILS SUBJECT TO CHANGE

Packaging Specifications
 Method: Tape & Reel
 PKG-0634
 www.midcom-inc.com

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.127]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

INDUCTOR

eiSos p/n: 750041377



DRAWING NO.

41377R-LF1

REVISIONS: SEE SHEET 1

SCALE ---

SHEET 2 OF 5