
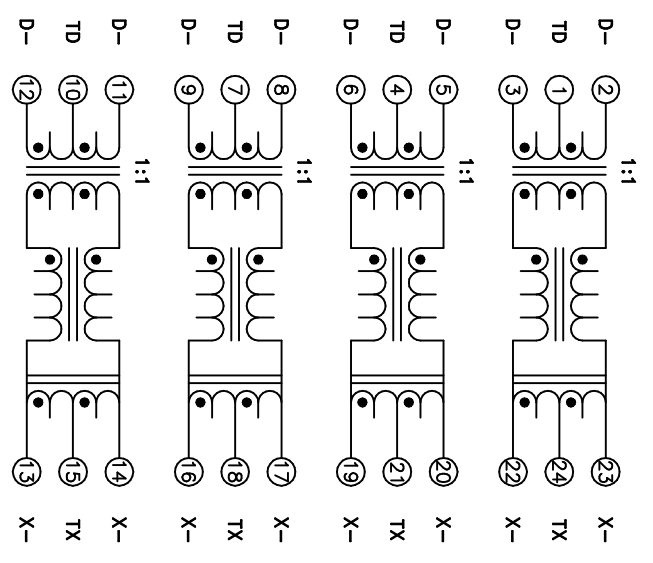
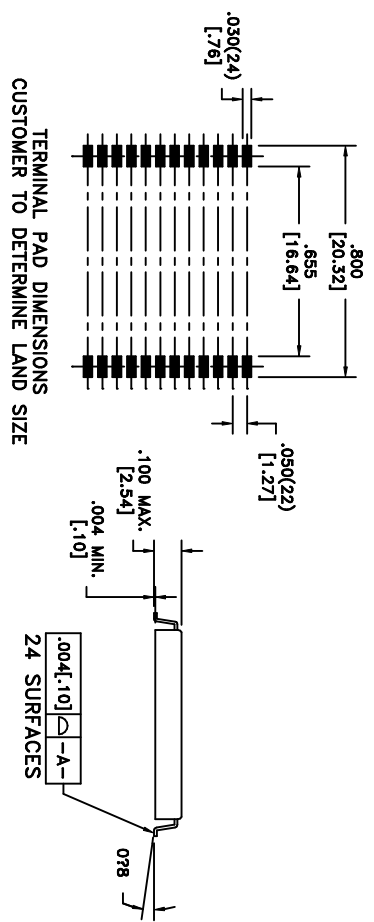


SOLDER SUFFIX	CUSTOMER TERMINAL	ROHS	LEAD(Pb)-FREE
LF1	Sn85%, Ag4%	Yes	No

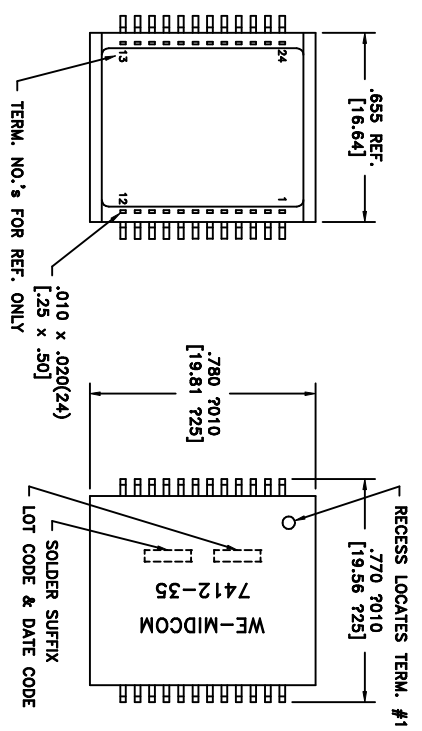

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- 1500Vrms, 1 minute tested by applying 1800Vrms for 1 second between 1-24 (tie 1+4+7+10, 15+18+21+24),**
- TURN RATIO:**
 (2-3):(23-22) = 1:1, ±2%.
 (5-6):(20-19) = 1:1, ±2%.
 (8-9):(17-16) = 1:1, ±2%.
 (11-12):(14-13) = 1:1, ±2%.
- INSERTION LOSS:**
 -1.0dB max., 300k - 100MHz.
- RETURN LOSS:**
 -18dB min., 500k - 40MHz.
 -15dB min., 40M - 60MHz.
 -12dB min., 60M - 80MHz.
 -10dB min., 80M - 100MHz.
- CROSSTALK:**
 -35dB min., 300k - 100MHz.
- CMRR:**
 -42dB min., 300k - 32MHz.
 -33dB min., 32MHz - 100MHz.
- OPERATING TEMPERATURE RANGE:** 0°C to +70°C.
- COPLANARITY:** All 24 terminals must lie on a plane within .004[.10] of Surface A after lead tinning.

Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005[.127]	DRAWING TITLE	DRAWING NO.	REV.
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	000-7412-35R-LF1	6D 1/07
		SCALE: ---	SHEET 2 OF 10
		REVISIONS: SEE SHEET 1	
		www.midcom-inc.com	