
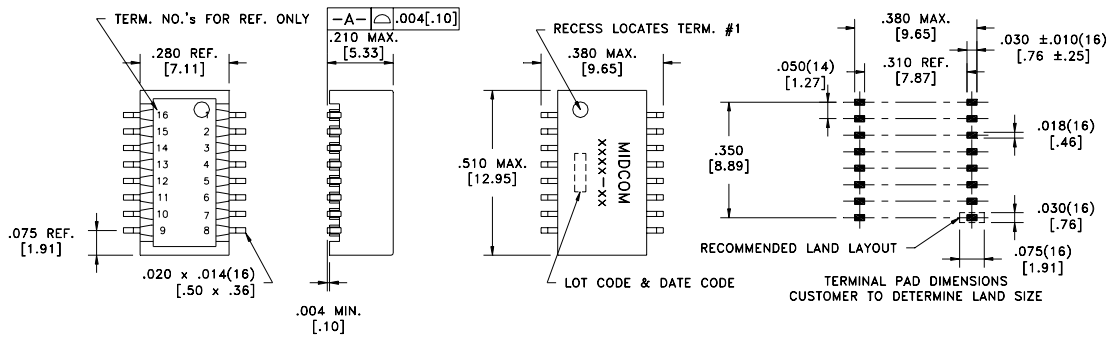


Discrete Fiber to Coax Transformer EDSO-G16

Features

- Supports E4/STS-3/STM-1/OC-3 applications
- Surface mount
- Optional pin-outs
- Industry standard connector footprint
- Optimum performance
- Cost Effective
- Both RoHS compliant and lead-terminal parts available
- 1500VAC isolation for 1 minute

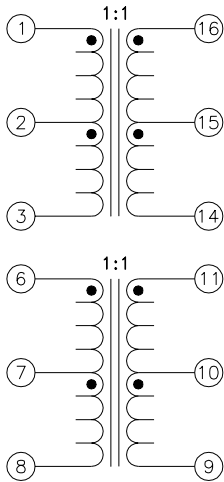

Part Number	Turns Ratio	Inductance	Leakage Inductance	Interwinding Capacitance	DC Resistance	Operating Temp. Range
000-7146-30	1CT:1CT	36µH min.	0.1µH max.	5pF max.	0.2Ω max.	0°C to +70°C

Details subject to change. Contact your Midcom sales representative for additional information. Dimensions: in/mm. All tolerances are ±.010/0.25 and electrical specifications are @25°C unless otherwise specified.