SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)–FREE (6C)
	Sn100%	No	No
LF3	Sn100%	Yes	Yes



(6B)

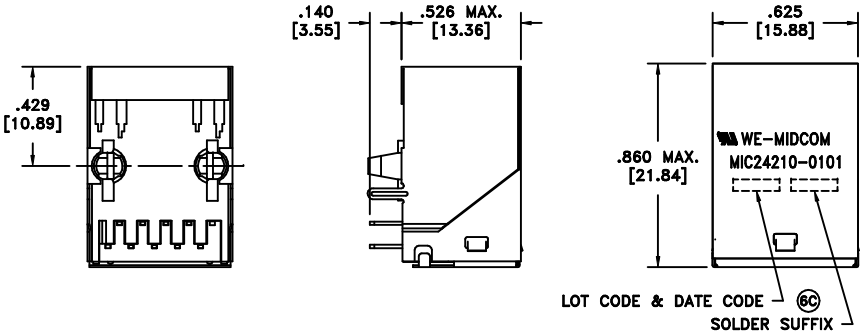

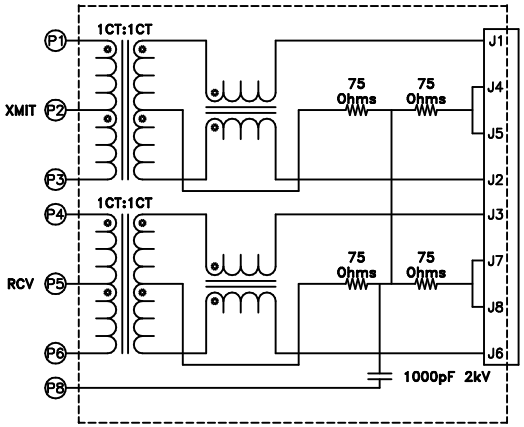

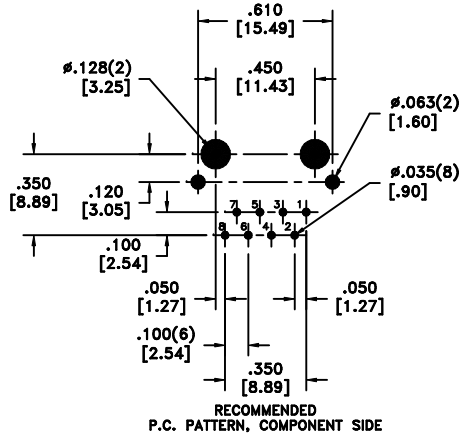

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

INDUCTANCE:	350? min., 100kHz, 100mV, 8mADC, J1–J2; J3–J6, Lp.
(6B) DIELECTRIC RATING:	1500Vrms for 1 minute tested between P1–J1(tie P1+P4).
TURNS RATIO/POLARITY:	(P1–P3):(J1–J2) = 1:1, ±2%. (P4–P6):(J3–J6) = 1:1, ±2%.
INSERTION LOSS:	–1.0dB max., 1MHz – 100MHz.
RETURN LOSS:	–18dB min., 1M – 30MHz. –16dB min., 30M – 45MHz. –14dB min., 45M – 60MHz. –12dB min., 60M – 80MHz.
(6B) CROSSTALK:	–33dB min., 1MHz – 100MHz.
COMMON MODE REJECTION:	–35dB min., 1MHz – 100MHz.

OPERATING TEMPERATURE RANGE: 0°C to +70°C.

(6C)

AGENCY NUMBER	
UL60950–1	E205930

Midcom, Inc.
Watertown, SD USA
Toll Free: 800–643–2661
Fax: 605–886–4486

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.010[.25]
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE (6C)
TRANSFORMER
10/100Mbs

Midcom

REVISIONS: SEE SHEET 1

DRAWING NO. (6C) **MIC24210-0101T/-LF3**

REV. 6C 1/07

SCALE ---

SHEET 2 OF 6