
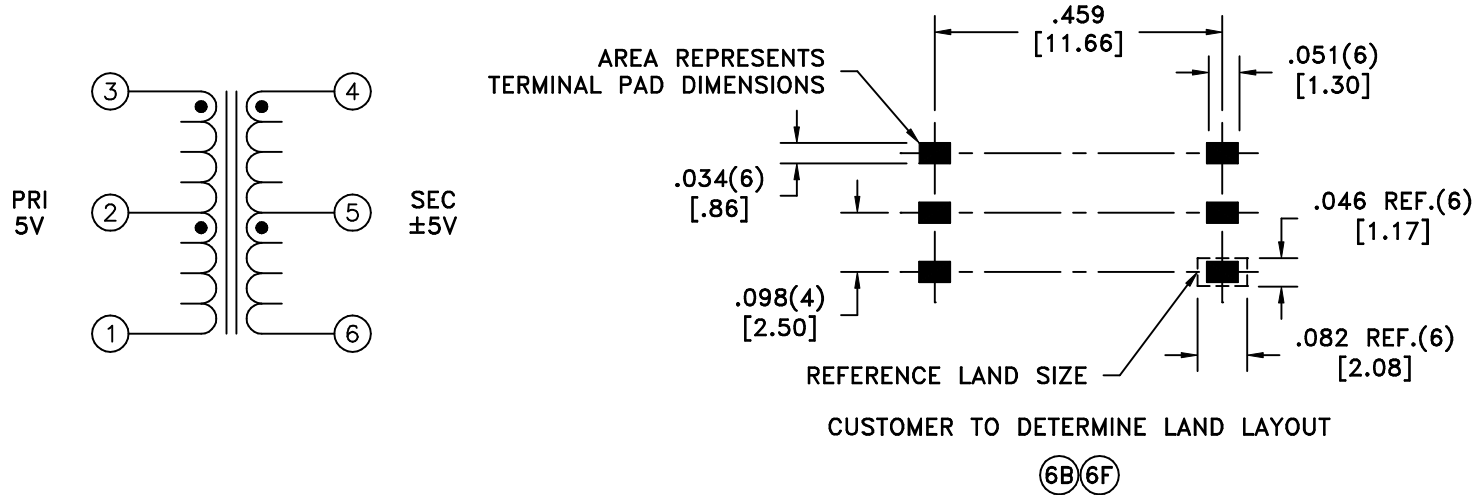


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	6H
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

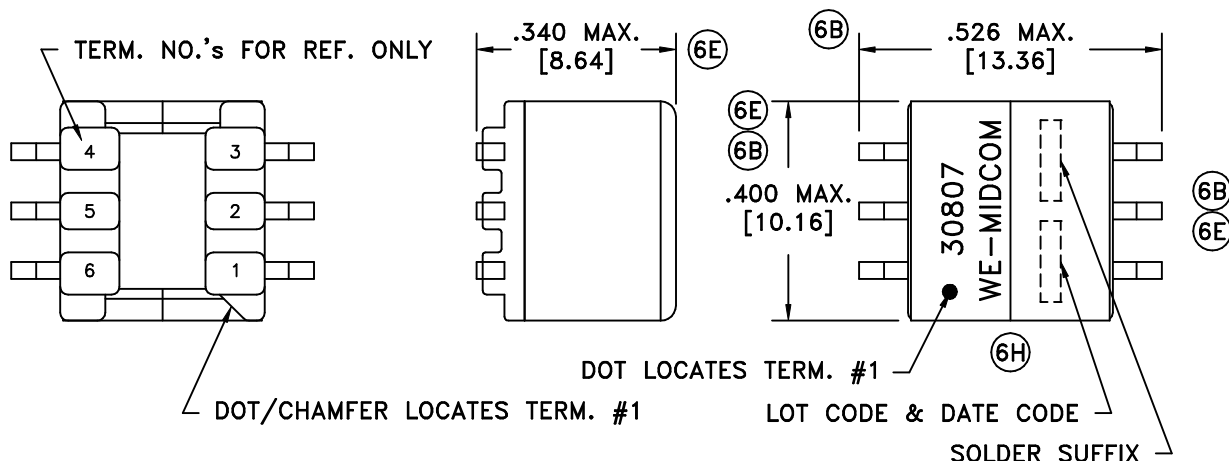

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 3-1, 0.251 ohms max.
4-6, 1.144 ohms max.

6B DIELECTRIC RATING: 1000VDC, 1 minute tested by applying 1250VDC for 1 second between PRI-SEC.

INDUCTANCE: 300uH min., 10kHz, 100mVAC, 3-2, Ls.

URNS RATIO:
 (4-5):(3-2) = 1.89:1, ±1%.
 (5-6):(3-2) = 1.89:1, ±1%.
 (5-6):(2-1) = 1.89:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified:
 Tolerances:
 Angles: ±1°
 Fractions: ±1/64
 Decimals: ±.005[.13]

This drawing is dual dimensioned.
 Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n:

REVISIONS: SEE SHEET 1

Midcom WE
 www.midcom-inc.com

DRAWING NO. **30807R/-LF1**

SCALE --- SHEET 2 OF 5

REV. 6H 11/05

DWG.# 30807R/-LF1