




SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6F)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

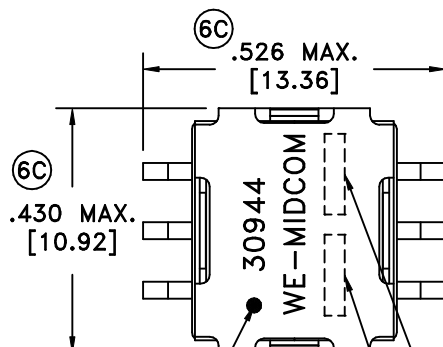


TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE

SOLDER SUFFIX



AREA REPRESENTS
TERMINAL PAD DIMENSIONS

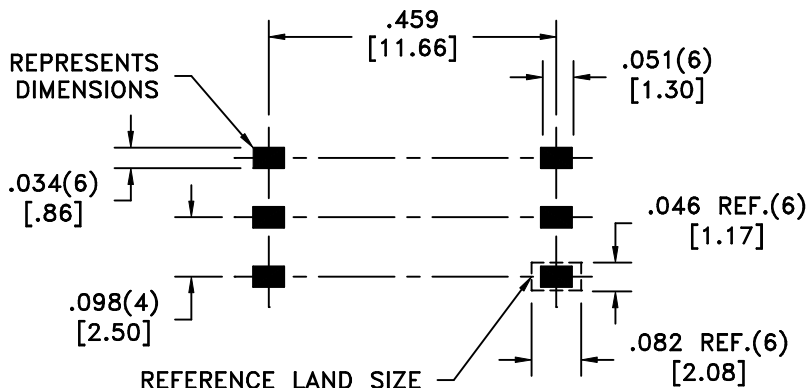

CUSTOMER TO DETERMINE LAND LAYOUT

(6C)(6E)

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	3-4, 0.360 ohms max. 1-6, 0.360 ohms max.
DIELECTRIC RATING:	400VDC, 1 minute tested by applying 500VDC for 1 second between 1-3.
INDUCTANCE:	100uH ±10%, 100kHz, 100mVAC, 0/600mADC, 3-4, Ls.
URNS RATIO:	(1-6):(3-4) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [.13]			DWG.# 30944R/-LF1
	DRAWING TITLE <h2 style="text-align: center;">TRANSFORMER</h2>	DRAWING NO. <h2 style="text-align: center;">30944R/-LF1</h2>	REV. (6D) 6G (6F) 8/06	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5	