


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6D)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

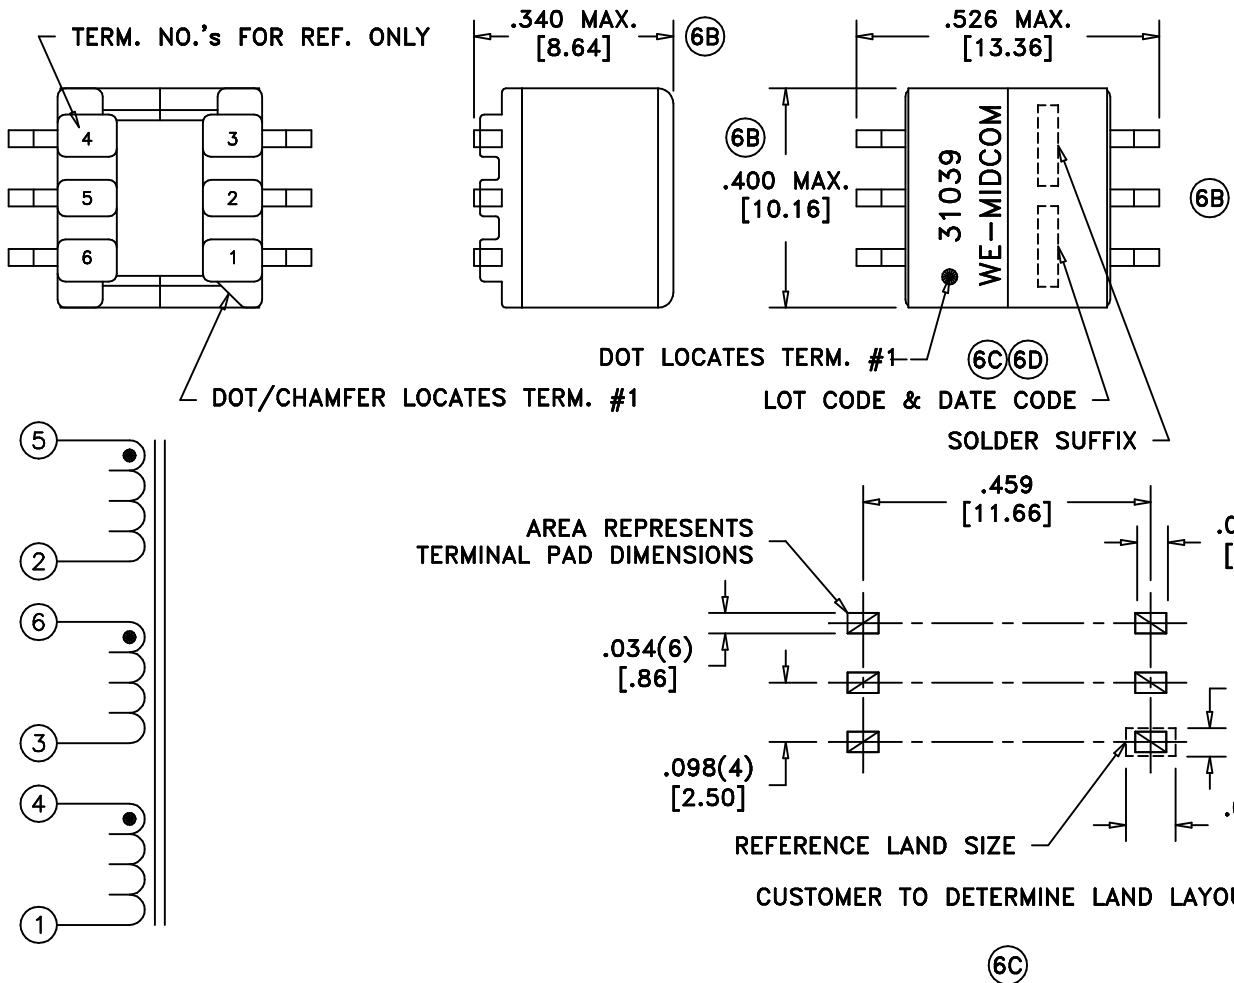

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 0.170 ohms max. for any winding.

DIELECTRIC RATING: 500VAC for 1 second between all windings.

INDUCTANCE: 200uH min., 10kHz, 10mVAC, 5-2, Ls.

TURNS RATIO: (5-2):(6-3) = 1:1, ±1%.
(5-2):(4-1) = 1:1, ±1%.

(6D) OPERATING TEMPERATURE RANGE: -40° to +125° including temp rise.

Midcom p/n 31039R-LF1 is eiSos p/n: 750031039.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13]	DRAWING TITLE TRANSFORMER	Midcom WE www.midcom-inc.com
	eiSos p/n: 750031039	DRAWING NO. (6D) REV. 6D 2/09
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE --- SHEET 2 OF 5