
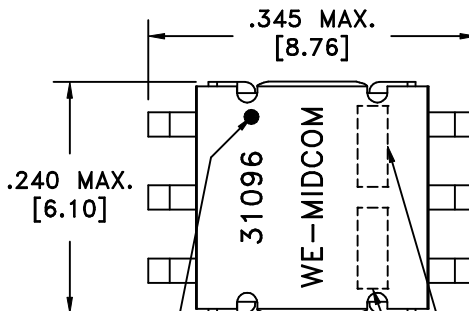



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF1	Sn96%, Ag4%	Yes	Yes

TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1


LOT CODE & DATE CODE

SOLDER SUFFIX

PRI



AREA REPRESENTS TERMINAL PAD DIMENSIONS

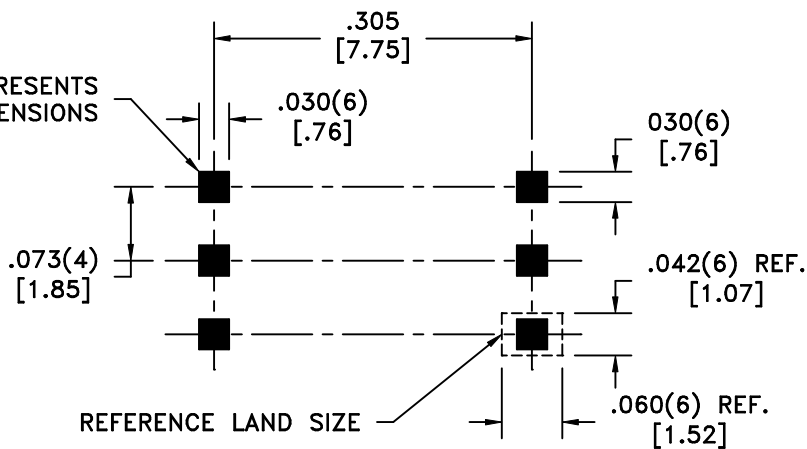

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):
 6-5, 1.50 ohms ±10%.
 5-4, 1.50 ohms ±10%.
 1-2, 4.10 ohms ±10%.
 2-3, 4.10 ohms ±10%.

DIELECTRIC RATING: 1250VDC, 1 minute tested by applying 1500VDC for 1 second between 6-1.

INDUCTANCE: 392uH min., 10kHz, 100mVAC, 6-5, Ls.

URNS RATIO:
 (5-4):(6-5) = 1:1, ±1%.
 (1-3):(6-5) = 5:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified:
 Tolerances:
 Angles: ±1°
 Fractions: ±1/64
 Decimals: ±.005[.13]

This drawing is dual dimensioned.
 Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750031096

REVISIONS: SEE SHEET 1

Midcom WE
 www.midcom-inc.com

DRAWING NO.
31096R-LF1

REV.
 6A
 10/07

SCALE --- SHEET 2 OF 5

DWG.# 31096R-LF1