


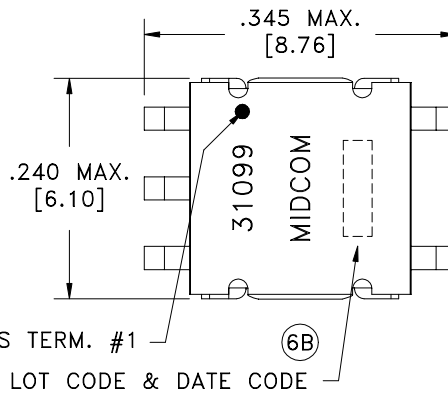



TERM. NO.'s FOR REF. ONLY



AREA REPRESENTS
TERMINAL PAD DIMENSIONS

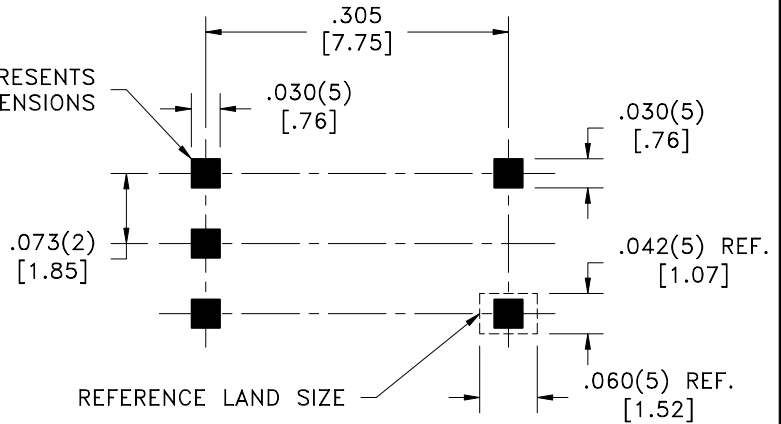

6B

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 6-4, 1.00 ohms max.
1-3, 3.12 ohms max.

DIELECTRIC RATING: 1250VDC, 1 minute tested by applying 1500VDC for 1 second between WINDINGS.

INDUCTANCE: 9.88uH ±20%, 10kHz, 100mVAC, 6-4, Ls.

URNS RATIO: (1-3):(6-4) = 3.00:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.

Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005 [.13]

DRAWING TITLE

TRANSFORMER

Midcom

DRAWING NO.

31099R

REV.

6B
8/06

REVISIONS: SEE SHEET 1

SCALE ---

SHEET 2 OF 5

DWG.# 31099R

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.