
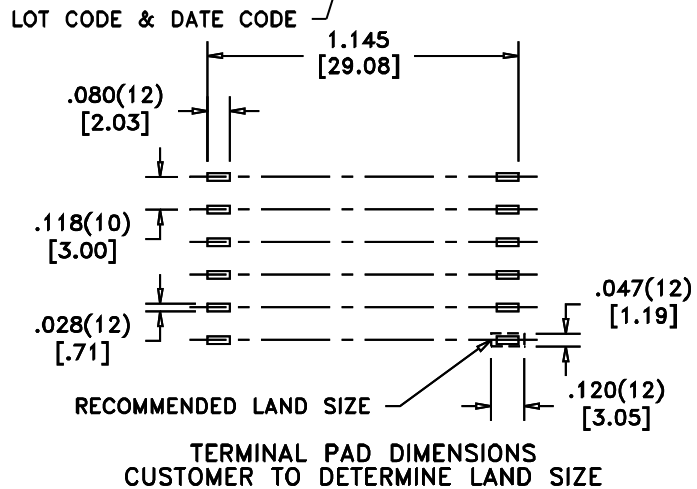
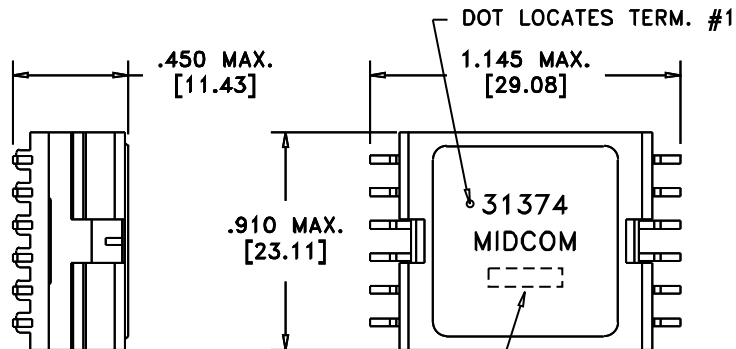
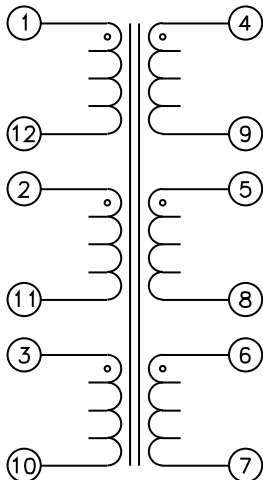


TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): All windings, 0.06 ohms max.
- DIELECTRIC RATING: 500VAC, 1 minute tested by applying 625VAC for 1 second between all windings.
- INDUCTANCE: 110uH min., 100kHz, 100mVAC, L_s.
- TURN_S RATIO:
 - (1-12):(3-10) = 1:1, ±1%.
 - (1-12):(4-9) = 1:1, ±1%.
 - (1-12):(2-11) = 1:1, ±1%.
 - (1-12):(5-8) = 1:1, ±1%.
 - (1-12):(6-7) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005(.127mm)				DWG.# 31374R
	DRAWING TITLE TRANSFORMER		DRAWING NO. 31374R	REV. 6A 7/01	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		REVISIONS: SEE SHEET 1		SCALE ---	SHEET 2 OF 5