



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
	Sn63%, Pb37%	No	No
LF1	Sn96%, Ag4%	Yes	Yes

6B(6D)

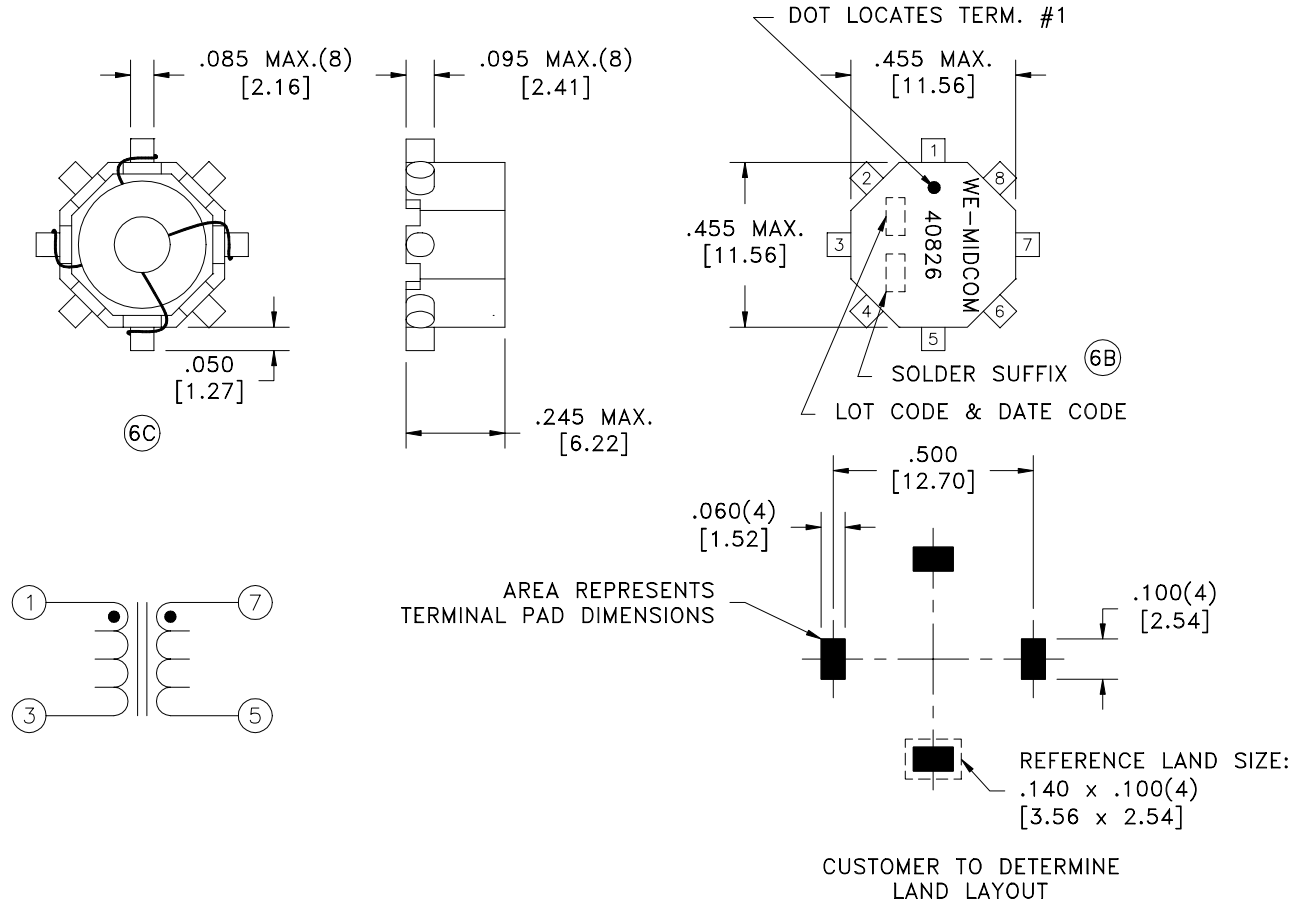

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- 6B D.C. RESISTANCE (@20°C): 1-3, 0.078 ohms ±20%.
7-5, 0.078 ohms ±20%.
 - DIELECTRIC RATING: 500VDC, 1 minute tested by applying 625VDC for 1 second between 1-7.
 - INDUCTANCE: 80uH ±50%, 100kHz, 250mV, 1.5ADC, 1-5(3+7), Ls.
20uH ±50%, 100kHz, 250mV, 3ADC, 1-3(7+1, 3+5), Ls.
 - TURNS RATIO: (1-3):(7-5) = 1:1, ±1%.
- Midcom p/n 40826R-LF1 is eiSos p/n: 750040826.

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE TRANSFORMER	 www.midcom-inc.com	DRAWING NO. 6B(6D) REV. 6D 40826R/-LF1 4/07
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		

DWG # 40826R/-LF1