
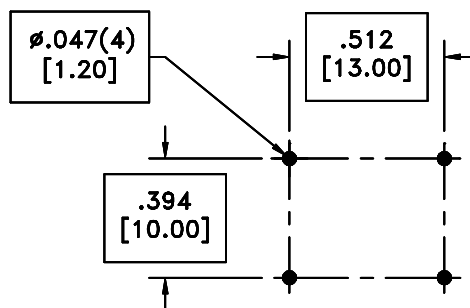



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6B)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

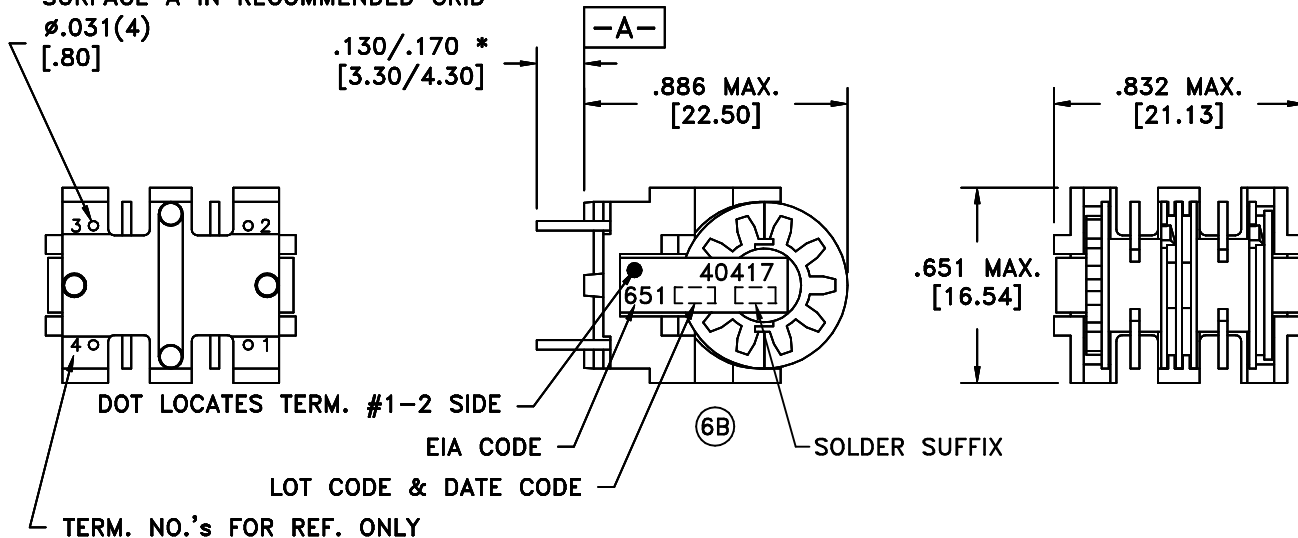

RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-2, 1.635 ohms $\pm 15\%$.
 4-3, 1.635 ohms $\pm 15\%$.
- DIELECTRIC RATING: 2000VAC, 1 minute tested by applying 2500VAC for 1 second between 1-4; 1-core; 4-core.
- INDUCTANCE: 22.0mH min., 10kHz, 100mVAC, 1-2 Ls.
 22.0mH min., 10kHz, 100mVAC, 4-3 Ls.
- TURNS RATIO: (4-3):(1-2) = 1:1, $\pm 1\%$.
- D.C. CURRENT: 0.4A continuous current based on maximum delta T of 40°C from 25°C.
- OPERATING TEMPERATURE RANGE: -25°C to +115°C.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13]	DRAWING TITLE <h2 style="text-align: center;">INDUCTOR</h2>	www.midcom-inc.com	
	eiSos p/n:	DRAWING NO. 40417/-LF1	(6B) REV. 6B 3/07
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5